

No Cut! Fireplace



Whether you aren't a fan of power tools, or live in an apartment and have no place to build, this project can be accomplished with just a drill, RapidFuse and can be assembled on a hard surface floor!

Items Needed:

Drill

Phillips drill bit

(2) 1" x 3" x 48" pine craft boards

(3) 1" x 2" x 48" pine boards

(4) 1" x 4" x 3' pine craft boards

(2) 1" x 4" x 48" pine boards

(2) 4" square wood Rosettes



(2) 4" x 6" wood plinth blocks

(4) 1" x 12" x 48" pine boards

(1) package of L-brackets - package contains 4 braces

DAP RapidFuse adhesive

clamps

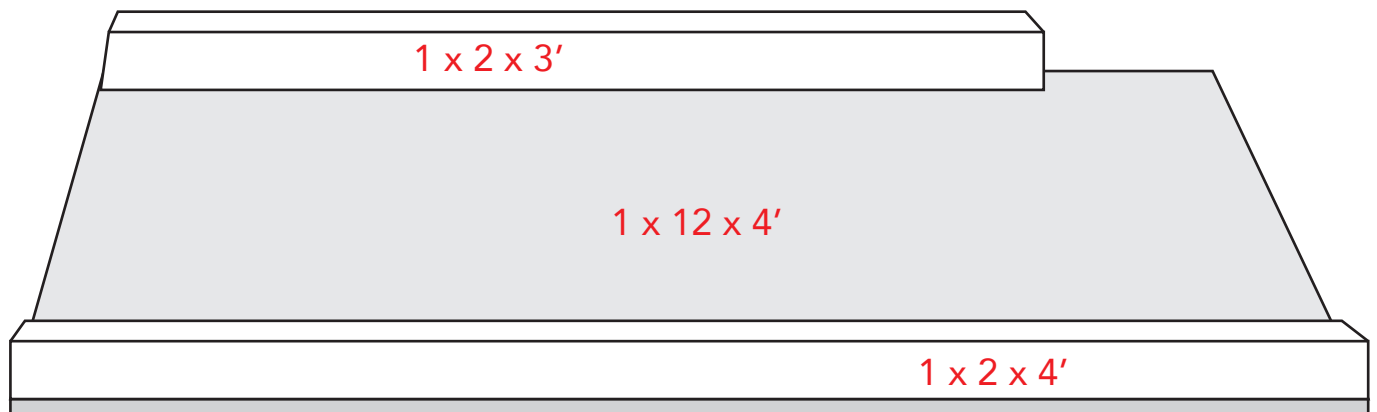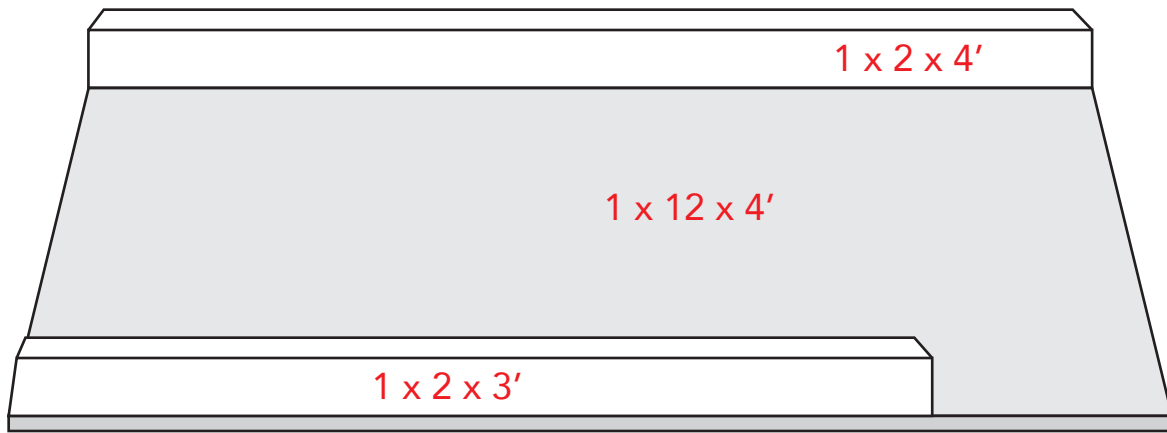

INSTRUCTIONS


1. Using RapidFuse and clamps, adhere a 1" x 2" x 3' board to one side of the 1 x 12, and a 1" x 2" x 4' board to the other side, as shown above. Glue the boards on the opposite side of the other 1 x 12, as shown above. These will be the legs of your fireplace. Use clamps to hold in place until dry.



2. Glue a 1" x 2" x 4' board to the last 1 x 12 board, as shown. This board will be the front piece that sits on top of your legs. Clamp together until dry.



3. Next, use RapidFuse to adhere a 1" x 4" x 4' board to the 1 x 12, butted up against the 1 x 2 board, as shown and clamp together until dry.

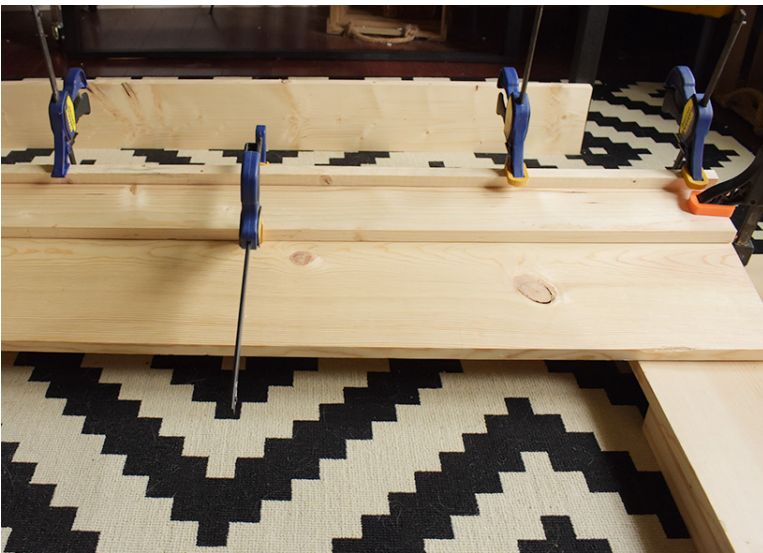

4. Use RapidFuse to glue the wood rosettes to the 1 x 12, butted up against the 1 x 4 board.







5. Glue a 1" x 4" x 4' board to the 1 x 12, butted up against the wood rosette. Clamp together until the glue is dry.




6. Now attach the front board to the flat side of the leg boards.

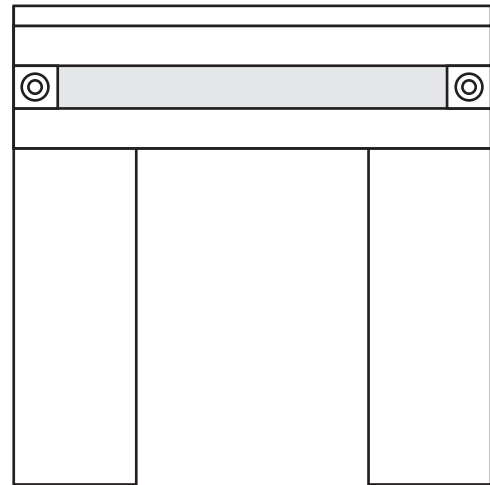

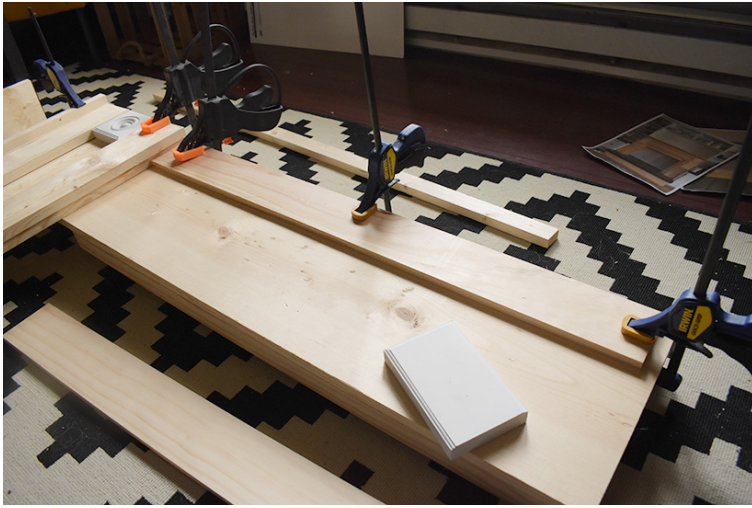


7. Glue a 1 x 4 x 3' board to the edge of one side of the fireplace leg. Clamp together until the glue is dry.

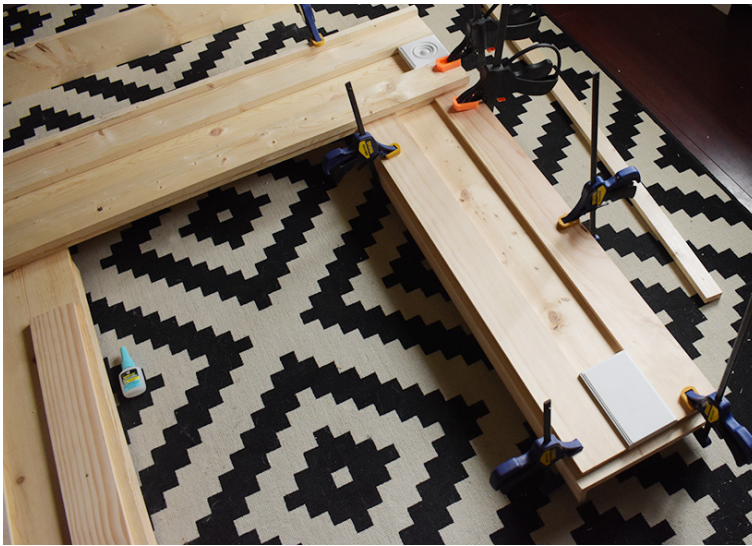

8. Glue the plinth block next to the 1 x 4 x 3' board. Then glue another 1 x 4 board, butted up next to the finial, as shown. Do this on both legs.



9. Stand your fireplace up on top of your last 1 x 12 board. Align the edge of the fireplace leg to the back of the 1 x 12 board. Use L-brackets and the screws they came with to attach the fireplace to the floor board. Use two L-brackets on each leg.

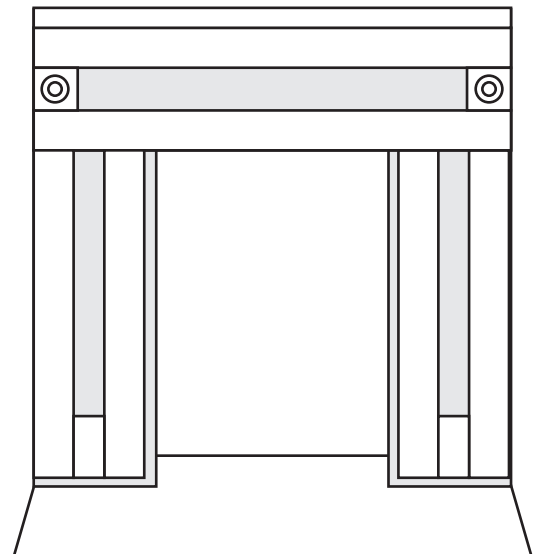



10. Use RapidFuse to adhere the 1" x 6" x 4' board to the top, making sure the back edge is aligned with the back edge of the fireplace. Clamp in place until dry.



Finish your fireplace with paint or stain. Make sure you use L-brackets to secure your fireplace to the wall to prevent it from falling over, as it is a little bit top heavy.

